
Technical Specifications

HP E27q G4 QHD Monitor

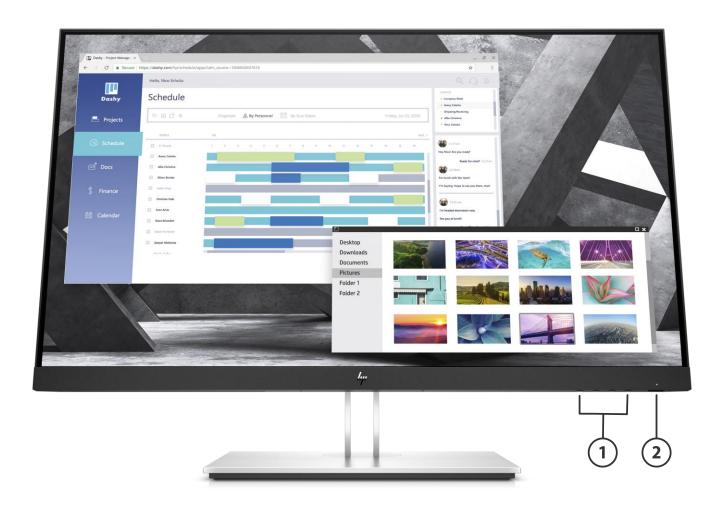


Front

OSD Buttons 2. Power Button

1.

Technical Specifications

HP E27q G4 QHD Monitor

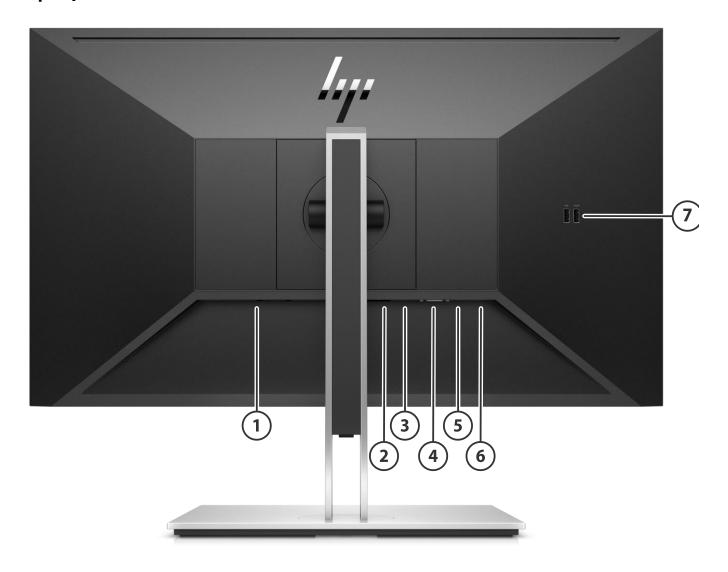

Back

- Power Connector
 DisplayPort™
- 3. HDMI Port
- 4. VGA Port

- 5. USB-B Port
- 6. USB-A Ports (2)
- **7.** USB-A Ports (2)

Technical Specifications

Models: 6PA56A8

Panel SpecificationsDisplay Size (Diagonal)27-inDisplay Panel TypeIPS

Micro-Edge Bezel Yes, 3-sided

Native Resolution/Timing2560 x 1440 @60HZPanel Bit Depth8-bit (16.7million color)

Aspect Ratio 16:9
Brightness - Typical 300 cd/m²
Static Contrast Ratio - Typical 1000:1
Static Contrast Ratio - Minimum 700:1
Dynamic Contrast Ratio (DCR) 5M:1
Flicker Free Yes

Pixel Pitch 0.2331(H) x 0.2331(V)

Pixels Per Inch (PPI) 109

Backlight Lamp Life (to half brightness 30k minimum

- in hours)

Anti-Glare Panel Yes
Response Time - Typical 5 ms
Horizontal Viewing Angle (typical 178°

CR>10

Vertical Viewing Angle (typical CR>10) 178°

Panel Active Area (w x h) 596.736(H) x 335.664(V) mm

Preset Graphic Modes/Supported 640 x 480 @60Hz Resolutions 720 x 400 @70Hz

720 x 400 @70Hz 800 x 600 @60Hz 1024 x 768 @60Hz 1280 x 720 @60Hz 1280 x 800 @60 HZ 1280 x 1024@60Hz 1440 x 900 @60Hz 1600 x 900 @60Hz 1680 x 1050 @60Hz 1920 x 1080 @60Hz 2560 x 1080 @60Hz

2560 x 1440 @60Hz **Maximum Resolution**2560 x 1440 @60Hz **Recommended Resolution**2560 x 1440 @60Hz

Vertical Scan Range50-60 HzHorizontal Scan Range30-90 kHzDefault Color TemperatureNeutral (6500K)

NOTE: Performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.

Color Gamut Coverage sRGB 99% sRGB

Color Management Factory Color Presets Neutral

Color Space / Subsampling Support RGB 4:4:4, YCBCR 4:4:4, YCBCR 4:2:2

Default Color Temperature Neutral (6500 K)

Low Blue Light Modes Yes
RGB Channel Adjust Yes, Gain



Technical Specifications

Monitor Specifications Exterior Color of Monitor Bezel and Black

Stand

Plug & Play Yes

 Tilt
 -5° to +20°

 Swivel
 +/-45°

 Pivot
 +/-90°

 Height Adjustment Range
 150 mm

VESA Mounting Yes, 100 mm with integrated mount or with included

bracket

Security Lock Ready Yes

Detachable BaseYes, ships detachedWarranty Based on region3-3-0 US/JP/AP/EU3-3-3 AP/PRC

On Screen Display (OSD)

On Screen Display User Controls Brightness+, Color, Image, Input, Power, Menu,

Management, Information

Monitor Control Buttons or Switches Menu, Minus ("-")/Information, Plus ("+") / Viewing Mode,

OK/Next Active Input, Power

User-Assignable Function Buttons Yes, 3 (6 Options)

Languages 10 (German, Dutch, T-Chinese and S-Chinese, English,

Spanish, French, Italian, Japanese, Portuguese)

Connector Types DisplayPort™ 1.2 in

HDMI 1 HDMI 1.4

VGA 1 HDCP support Yes

USB Port Specifications

Specs

USB Version 3.2

USB HubYesDownstream Ports4 PortsUpstream Ports1 Port

Fast Charging USB Ports 1 Ports (Side) (USB-A) **Power Output Maximum** Fast Charging: 7.5 W

Special Features User Presets Yes

User Updateable FirmwareYesPower & OperatingPower SupplyInternal

Power Source 100 – 240 VAC 50/60 Hz

Power Consumption - Maximum60 WEnergy Saving/Standby Mode0.5 WPower Consumption - Typical25 WPower cable length1.9 m

EU Energy Efficiency Class (EC1062) **On-mode Power Consumption** 16 W

(EC 1062/2010)

Annual Power Consumption 24 kWh

(EC 1062/2010)

Energy Efficiency Class (EC 1062/2010) A+

Visible Screen Size 27" / 68,6 cm Diagonal

Operating Conditions Operating Temperature - Celsius $5^{\circ}-35^{\circ}C$

Operating Temperature - Fahrenheit $41^{\circ}\text{C} - 95^{\circ}\text{F}$ Non-operating Temperature - Celsius $-34^{\circ} - 60^{\circ}\text{C}$

Technical Specifications

Non-operating Temperature --29° - 140°F

Fahrenheit

Operating Humidity 20 – 80% Relative Humidity (non-condensing)

Non-operating Humidity 5 - 95%

Operating Altitude 0 – 5,000 m (16,400 ft.) **Non-operating Altitude** 0 - 12,192 m (40,000 ft.)

Environmental Features and Certifications

Mercury-free LED display backlighting

Arsenic-Free Display Glass

Low Halogen*

Yes, Mercury-free LED backlighting

Yes

GSE HP-00011-01B, table 2 defines low-halogen (BFR, CFR,

PVC)

NOTE: External power supplies, power cords, cables and peripherals are not Low Halogen. Service parts obtained

after purchase may not be Low Halogen.

WW certificate **Agency Approvals and Certifications**

CE, CB, KC/KCC/NOM/ISO 9241-307/ EAC/TUV-

GS/cTUVus/PSB/CCC/CEL/ISC/VCCI/FCC/BSMI/Vietnam MEPS/Australian-New Zealand MEPS/WEEE/BIS/CEC/E-

Imperial

Standby/Low Blue Light/CECP/TUV-S/CECP

Microsoft WHQL Certification Win 10, Win 8, Win 7

China Energy Label CEL Grade 1 SmartWay Transport Partnership - NA Yes (NA SKU)

only

1 QSP 1 Doc-Kit

NOTE: DisplayPort[™] and the DisplayPort[™] logo are trademarks owned by the Video Electronics Standards Association (VESA®) in the United States and other countries. Metric

Unit Product/Package Specifications

Software Included

What's in the box?

		· · · · · · · · · · · · · · · · · · ·	IIIIpciiat
!	Product Dimensions (Unpacked with stand) (W x D x H)	61.33 x 21.6 x 53.6 cm	24.15 x 8.5 x 121.1 in
	Product Dimensions (Packed) (W x D x H)	69.5x 44.4 x 22.5 cm	27.36 x 17.48 x 8.86 in
	Display Head Dimensions (Unpacked without stand) (W x D x H)	61.33 x 4.7 x 36.61 cm	24.15 x 1.85 x 14.41 in
	Base Area Footprint (w x d mm)	287.97 x 215.97 mm	11.34 x 8.5 in
	Bezel Measurements	Bottom 21.17 mm	
	Product Weight (Unpacked with stand)	(display chin)	Bottom 0.83 in
	Product Weight (Packed)	(display chin)	
	Product Weight (Head Only)	7.0 kg	15.43 lb
	HP Display Center		
	1 HDMI 2.0	(1.8 m) 5.9 ft	
	1 DisplayPort™ (DisplayPort™ 1.2)	(1.8 m) 5.9 ft	
	1 USB 3.2	(1.8m) 5.9 ft	
	1 Power Cord	(1.9 m) 6.2 ft	



^{*}External power supplies, power cords, cables and peripherals are not Low Halogen. Service parts obtained after purchase may not be Low Halogen.

Technical Specifications

User Guide and Warranty Languages **User Guide Languages**

Warranty Languages

English, Arabic, S. Chinese, T. Chinese, Czech, Danish, Dutch, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, Brazilian Portuguese, Russian, Slovenian, Spanish, Swedish and Turkish.

English, Arabic, S. Chinese, T. Chinese, Czech, Danish, Dutch, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, Brazilian Portuguese, Russian, Slovenian, Spanish, Swedish and Turkish.



Technical Specifications

Copyright © 2020 HP Development Company, L.P.

The information contained herein is subject to change without notice. The only warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein. Microsoft and Windows are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. ENERGY STAR is a registered trademark owned by the U.S. Environmental Protection Agency.



Summary

Change Log					
	V1 to V2				

